



Hisense Sero 7 Pro Rear Camera Replacement

This guide will show the user how to complete the rear camera replacement on the Hisense Sero 7 Pro tablet.

Written By: Baochau Nguyen






TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Rear Camera

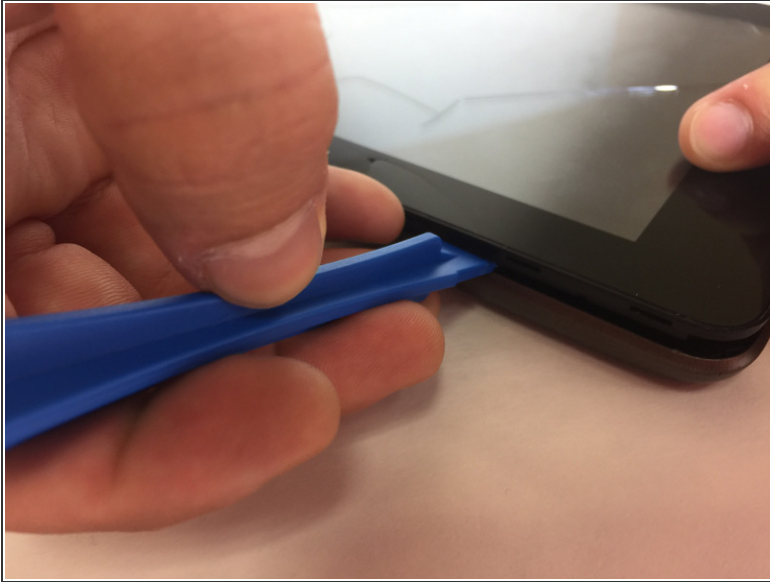


- i Turn tablet off before disassembling it.
- ! Use caution when handling device if screen is cracked.
- Using a plastic opening tool, pry open the back cover from the tablet.
- i An extra set of hands may be required.

Step 2

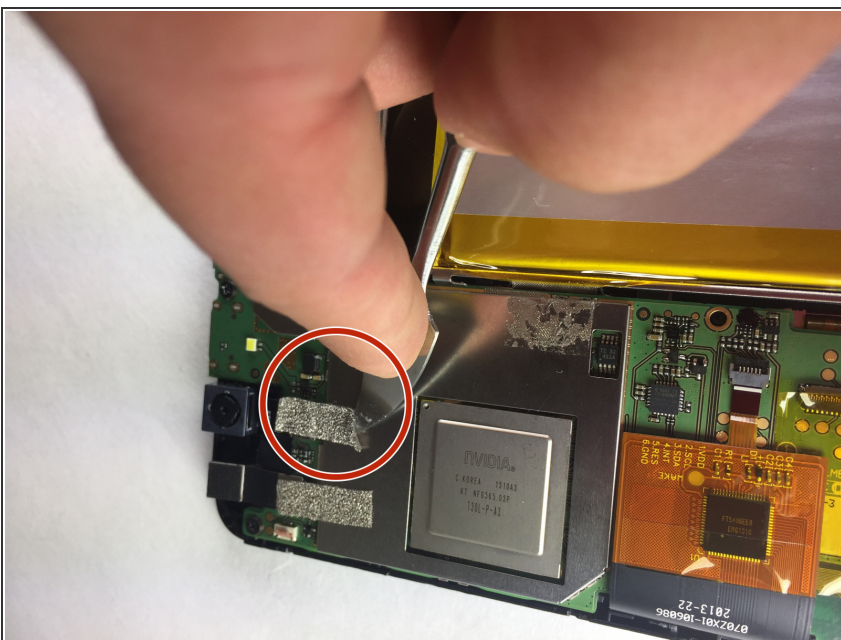

- Using a metal or nylon spudger, begin to peel the tape from the motherboard that it is attached to the camera.
- i If needed, the same steps can be applied to front camera.

Step 3

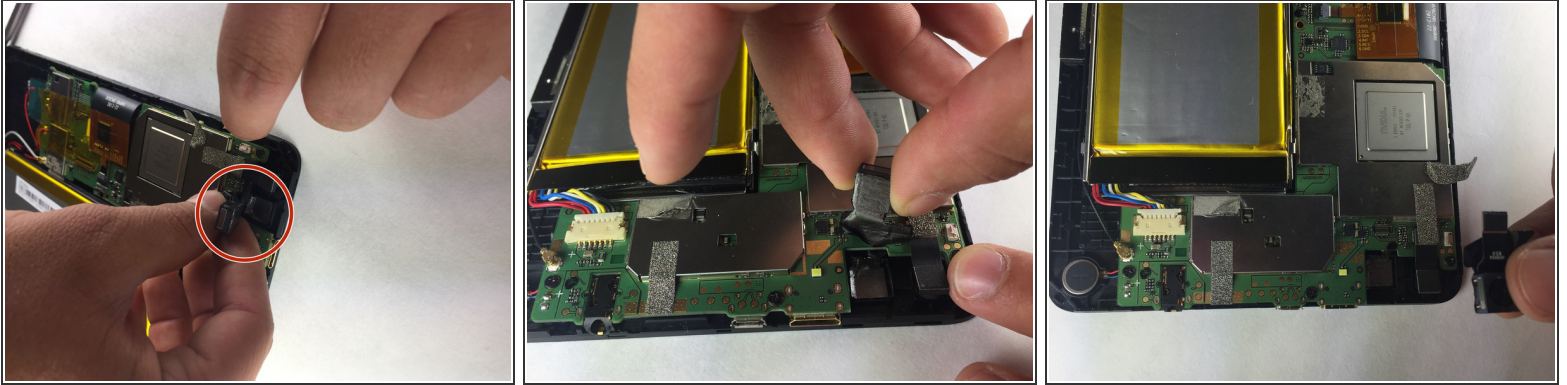

- Pull the camera toward you to detach from the tablet.

 Use caution when detaching camera from port.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-07 09:00:55 PM.